



Manual system for sliding doors with double leaves, 80 kg maximum per door leaf - Patented



Features and advantages:

- Minimum door thickness of 50 mm
- Pleasing appearance and excellent hygiene properties are achieved by the 15 microns anodised aluminium rail concealing the mechanical components
- Smooth and silent operation through using a dual roller system
- Easy opening with both synchronised leaves door and soft ramps
- Safety is maximised through use of an anti-derailment feature
- The rail is easy to mount and requires minimum maintenance
- Extremely compact
- Excellent protection against corrosion
- Products in accordance to the UKCA/European Directives and Standards
- Perfect to be set up in configuration with limited lateral space
- The FERMATIC 2130DV is a perfect answer for use within the Food Industries, Kitchens, Clean Rooms and Supermarkets.

ACCESSORIES

- External and internal fixed handles
- Gaskets

OPTIONS




- Frame guiding system
- Cover
- Sliding door self closure *
- Automatic system *

* Ask for detailed literature





FERMATIC 2130 DV

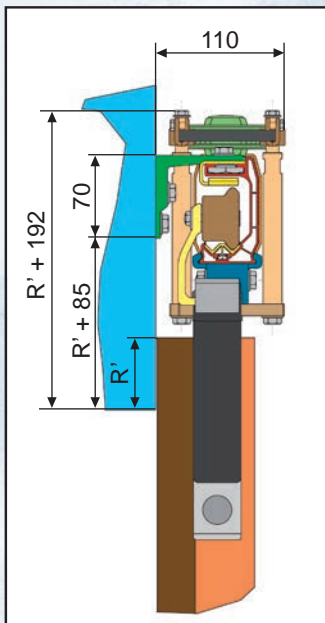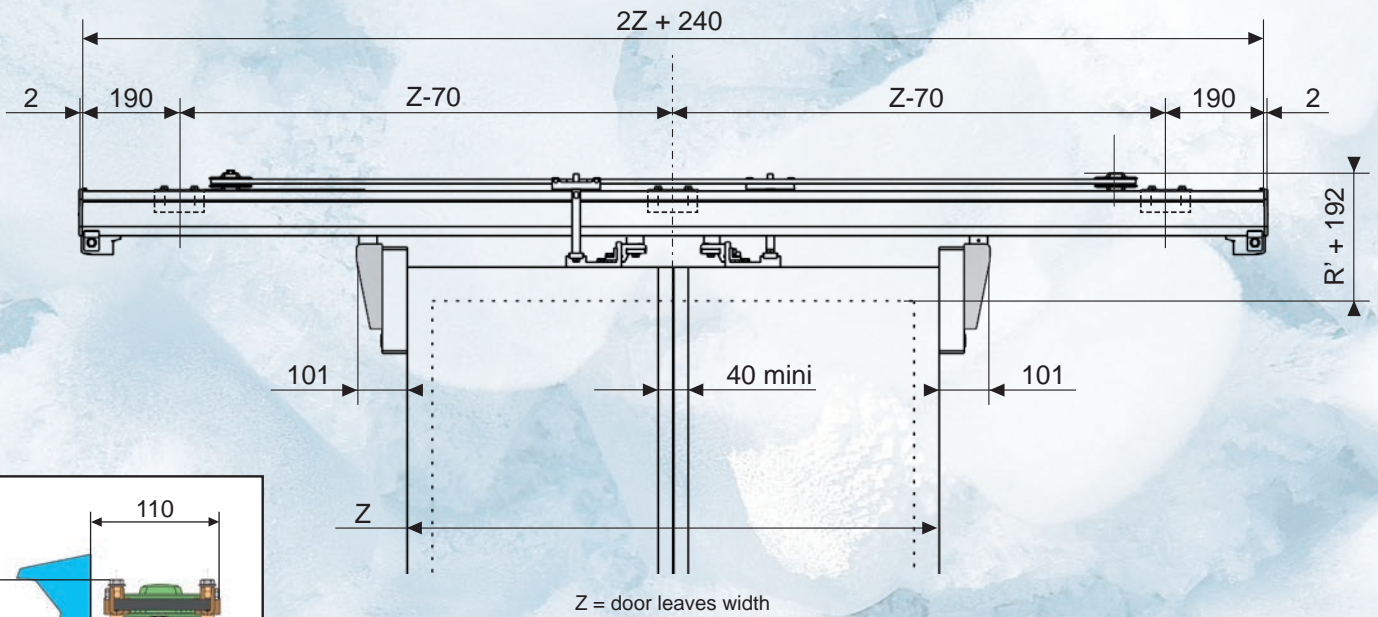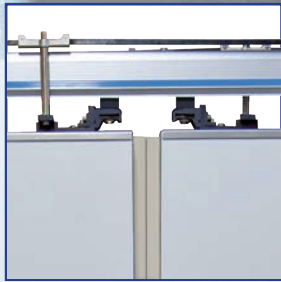

References	Door leaves width (Z)
2131DV	890 to 1090 mm
2132DV	1091 to 1290 mm
2133DV	1291 to 1490 mm
2134DV	1491 to 1690 mm
2135DV	1691 to 1990 mm
2136DV	1991 to 2290 mm
2137DV	2291 to 2590 mm

. Delivered also in 6140 mm length

DISTRIBUTOR

Imprimerie PolyserVICES - Beauvais

08/2021



FERMOD®



3 avenue Eugène Gazeau - 60300 SENLIS - FRANCE
Tél. : +33 (0)3 44 53 12 86 - Fax : +33 (0)3 44 53 62 03

www.fermod.com • e-mail: contact@fermod.com

Siège Social : Senlis (Oise) - Société Anonyme au Capital de 1 004 400 €

RCS Compiègne B 301 468 211 - Siret 301 468 211 00018 - APE 2572 Z

Manual FERMATIC systems



« In order to improve the quality of our products, FERMOD reserves the right to modify any products without notice. The characteristics and pictures of the products presented on this documentation are not of any legal value. »