



## Manual systems for sliding doors up to 130 or 180 kg for clean environment



### Features and advantages:

- For doors of 40mm to 60mm door thickness, with frame thickness up to 10mm
- Compact dimensions. The track is fixed directly onto the frame and ramps and stops are integrated in.
- Articulated aluminium cover with adapted design for clean rooms application and to receive, without any modification, an automatic kit. Color RAL 9010.
- Safety is maximised through use of an anti-derailment feature
- Bottom guide rail fixed under the door
- The rail is easy to mount and requires minimum maintenance
- Smooth & silent operation
- Products in accordance to the UKCA/European Directives and Standards

### ACCESSORIES

- External lever handles, edge-fixing
- External and internal fixed handle
- Simple gasket, light grey color

### OPTIONS



- Automatic Kit \*
- Two door leaves system \*

\* Ask for detailed literature





# FERMOCLEAN 2920

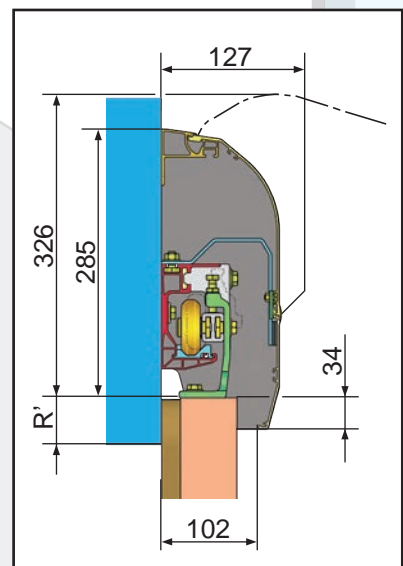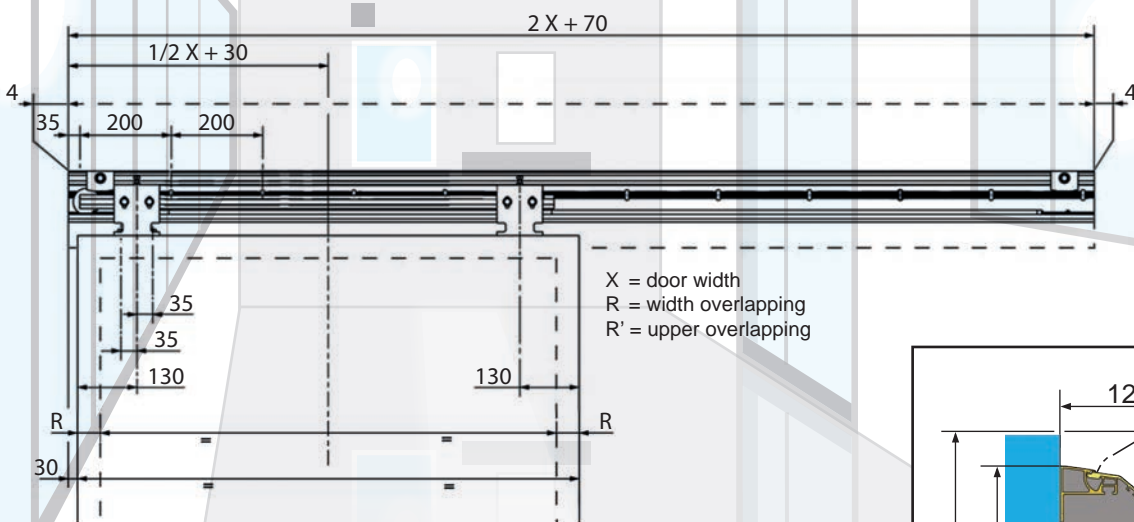

References	Door width
2921 / 2921-180 kg	900 to 1100 mm
2922 / 2922-180 kg	1101 to 1300 mm
2923 / 2923-180 kg	1301 to 1500 mm
2924 / 2924-180 kg	1501 to 1700 mm
2925 / 2925-180 kg	1701 to 2000 mm
2926 / 2926-180 kg	2001 to 2300 mm
2927 / 2927-180 kg	2301 to 2600 mm

DISTRIBUTOR

Imp. Polyseviours - Beauvais

08/2021



## FERMOD®



3 avenue Eugène Gazeau - 60300 SENLIS - FRANCE  
 Tél. : +33 (0)3 44 53 12 86 - Fax : +33 (0)3 44 53 62 03

[www.fermod.com](http://www.fermod.com) • e-mail: [contact@fermod.com](mailto:contact@fermod.com)

Siège Social : Senlis (Oise) - Société Anonyme au Capital de 1 004 400 €  
 RCS Compiègne B 301 468 211 - Siret 301 468 211 00018 - APE 2572 Z